



We put space to work.

## MetroMax® Top-Track® High-Density Storage

For MetroMax i, MetroMax 4 and MetroMax Q



- **Maximizes Storage Capacity:** Top-Track can increase the storage capacity of a given area up to 40%. The system allows more storage units to fit in a defined space. A movable, open aisle allows full access to each entire shelving unit thus eliminating hard to reach or “dead” spaces.
- **Easy Access:** The overhead track system guides the mobile units and opens an access aisle between any two units, whenever it is needed. The track is above the storage units enabling easy access for employees or for utility carts, simplifying the material handling task.
- **Cost-Saving Performance:** This efficient utilization of space addresses the storage needs of new or growing operations. In a new facility, less square footage would have to be dedicated to storage. In growing operations, MetroMax Top-Track can eliminate the need to expand the facility to handle increasing storage requirements, greatly reducing the costs associated with a growing business’s needs.
- **Uniquely Interchangeable:** Corrosion resistant MetroMax Q steel posts can improve the overall rigidity of the Top-Track system in higher weight bearing applications. Polymer posts are offer rust-proof performance.

- **Clean Design:** Guide tracks are installed overhead enabling easy cleaning of floors. MetroMax shelves feature removable polymer mats. \*Microban antimicrobial product protection is built into the high contact areas of the shelving systems — shelf mats, frames, and posts — to inhibit the growth of bacteria, mold, mildew, and fungus that cause odors and product degradation. Microban product protection keeps the shelves and posts “cleaner between cleanings”.
- **Increased Productivity:** With reduced square footage dedicated to storage, MetroMax Top-Track maximizes the amount of productive “front of the house” space available, increasing daily revenues.

The system compensates for uneven floor surfaces. Floor should be smooth and free from large cracks or raised obstacles.

### All MetroMax shelving styles are available for Top-Track configurations.

**MetroMax i:** (heavier duty polymer shelving with stainless corners) most commonly used with polymer posts. See spec sheet 9.20 for more information.

**MetroMax 4:** all-polymer shelving; most commonly used with polymer posts. See spec sheet 9.22 for more information.

**MetroMax Q:** (hybrid polymer and wire shelving) most commonly used with epoxy coated steel posts. See spec sheet 9.21 for more information.

L02-180 Printed in U.S.A. 11/21

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2021 InterMetro Industries Corp.



MetroMax® Top-Track® High-Density Storage



9.29



# MetroMax® Top-Track® High-Density Storage

## SYSTEM COMPONENTS

- A** = Stationary End Units
- B** = Stationary Intermediate Unit (Optional)
- C** = Track Set
- D** = Mobile Units
- E** = Open Aisle



## System Measurements

- Actual length: Nominal track length + the nominal width of each end unit + 2" (51mm)
- Actual width: Nominal Shelf length + 3-1/2" (89mm)
- Actual height of system is approximately 87" (2210mm)

It is recommended that the tracks are installed at least 5" (127mm) from the wall.

## Mobile Unit Measurements

To accommodate bumpers, the actual size of a mobile unit is 2.5" (63.5 mm) wider than the shelf width shown. For example, an 18" (457 mm) wide unit is actually 20.5" (521 mm).

**Choosing shelves:** All end, intermediate, and mobile units must be 18" (457 mm) or wider. Choose from MetroMax i, MetroMax 4, or MetroMax Q options.

## Stationary End Unit Kit (Choose one kit for each system)

Includes 86" high posts (2184mm) high stationary posts, and hardware necessary for connecting stationary end units to tracks. Shelves are sold separately.



Traditional Configuration with stationary end units. ONE End Unit Kit is required per system. Shelves are ordered separately.

Fits Shelf Width (in.) (mm)	MetroMax Q Steel Posts			MetroMax Polymer Posts		
	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.
18 457	55.4	25.1	<b>MQTTE18</b>	31.0	15.7	<b>MXTTE18</b>
21 530	55.9	25.4	<b>MQTTE21</b>	31.5	15.9	<b>MXTTE21</b>
24 610	56.4	25.6	<b>MQTTE24</b>	32.0	16.1	<b>MXTTE24</b>

Note: All kits come with plated foot plates. Stainless Steel Foot plates must be ordered separately

## Stationary Intermediate Units

Required when overall desired track length exceeds 21' (6405mm). Optional when track length is under 21' (6405mm). Includes 86" high posts (2184mm) high stationary posts, and hardware necessary for connecting one stationary intermediate unit to tracks. Shelves are sold separately.



ONE Intermediate Kit (see rules). Shelves are ordered separately.

Fits Shelf Width (in.) (mm)	MetroMax Q Steel Posts			MetroMax Polymer Posts		
	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.
18 457	32.2	14.6	<b>MQTTA18</b>	21.8	9.9	<b>MXTTA18</b>
21 530	32.7	14.8	<b>MQTTA21</b>	22.3	10.1	<b>MXTTA21</b>
24 610	33.2	15.1	<b>MQTTA24</b>	22.8	10.3	<b>MXTTA24</b>

Note: All kits come with plated foot plates. Stainless Steel Foot plates must be ordered separately

## Mobile Units (One kit required per mobile unit)

Includes four 74" (1880mm) high mobile posts, four casters, donut bumpers, guide rollers, and other hardware to assemble a mobile unit. Shelves are sold separately.



ONE Mobile kit per mobile unit. Example: (6) needed in the above picture. Shelves are ordered separately.

Fits Shelf Width (in.) (mm)	Approx. Pkd. Wt. (lbs.)	(kg)	MetroMax Q Steel Posts		MetroMax Polymer Posts			
			Cat. No. with Plated Casters	Cat. No. with Stainless Casters	Cat. No. with Plated Casters	Cat. No. with Stainless Casters		
18 457	32.2	14.4	MQTTM18C	MQTTM18S	21.8	10.2	MXTTM18C	MXTTM18S
21 530	32.7	14.5	MQTTM21C	MQTTM21S	22.3	10.3	MXTTM21C	MXTTM21S
24 610	33.2	14.6	MQTTM24C	MQTTM24S	22.8	10.4	MXTTM24C	MQTTM24S

Note: Casters have polyolefin treads.

Under normal conditions, aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).



## Track Sets

Includes tracks and hardware needed to assemble track runs up to 21' (6400mm).

Dimensions Length		Approx. Pkd. Wt.		Super Erecta Brite Cat. No.	Dimensions Length		Approx. Pkd. Wt.		Chrome Cat. No.
(ft.)	(mm)	(lbs.)	(kg)		(ft.)	(mm)	(lbs.)	(kg)	
2.5	762	15.0	6.8	<b>TTS2.5NA</b>	14	4267	98.0	44.1	<b>TTS14NA</b>
6	1828	40.5	18.2	<b>TTS6NA</b>	15	4572	106.5	47.9	<b>TTS15NA</b>
7	2135	47.5	21.3	<b>TTS7NA</b>	16	4877	113.5	51.0	<b>TTS16NA</b>
8	2440	56.0	25.2	<b>TTS8NA</b>	17	5182	121.0	54.4	<b>TTS17NA</b>
9	2743	62.5	28.1	<b>TTS9NA</b>	18	5486	128.0	58.0	<b>TTS18NA</b>
10	3048	69.5	31.2	<b>TTS10NA</b>	19	5791	135.0	60.7	<b>TTS19NA</b>
11	3352	76.5	34.4	<b>TTS11NA</b>	20	6096	142.0	63.9	<b>TTS20NA</b>
12	3657	83.5	37.5	<b>TTS12NA</b>	21	6400	149.0	67.0	<b>TTS21NA</b>
13	3962	92.0	41.4	<b>TTS13NA</b>					

Note: Note: TTS2.5NA includes a joining kit to connect the tracks to other track sets.

## For best performance on heavily loaded systems:

- For configurations using shelves 60" (1524mm) or longer and managing heavier loads choose a more rigid shelving option. Wire shelving – Use all SES wire shelves. Polymer Shelving (MetroMax) – Epoxy coated steel posts offer the most rigid configuration.
- Mobile Units: If 18" (457mm) wide mobile units are planned, the maximum allowable size shelf is 60" (1524mm) long. If 18" (457mm) wide by 60" (1524mm) long mobile units are planned, a maximum of five 18" (457mm) mobile units are allowable between two stationary units. 18" (457mm), 21" (530mm) and 24" (610mm) wide mobile units can be intermixed in a given system. The standard system requires 74" (1880mm) posts on the mobile units.
- Weight capacities (evenly distributed) - Mobile Units. Super Erecta, Super Erecta Pro, Super Adjustable, MetroMax Q, MetroMax i: up to 900lbs. (408kg) MetroMax 4: up to 750lbs (340kg)
- When using long tracks, 13ft or longer, securing the stationary units to the floor will help to keep the system in alignment.

## Additional Configuration Notes

- Standard Top-Track models include 86" (2185mm) stationary posts and 74" (1880mm) stem caster mobile posts. If a taller system or shorter system is required, consult Metro Engineering.
- Existing Metro Super Erecta, Super Adjustable, Super Erecta Pro, MetroMax Q, MetroMax 4, and MetroMax i shelving units can be retrofitted as part of a Top-Track installation.

## Installation Guidelines

- It is recommended that the tracks are installed a minimum of 5" (127mm) from the wall.
- It is the discretion of the user to install the end units to the floor.
- Floor should be level, smooth, and free from cracks and raised objects.
- For new construction, it is recommended that flooring of suitable durability is used in areas where Top-Track will be installed. When such flooring is not an option, floor pad protectors are recommended to protect soft flooring materials from wear and tear.
- Enclosure panels may be used on mobile units. Panels must be mounted to ensure they do not interfere with the tracks. For standard MetroMax Top-Track Mobile Units with 74" (1890mm) posts, use the enclosures for the 63" (1585mm) posts.

## Mobile Unit – Space Calculator . (Use to help determine the quantity of mobile units and the open aisle dimension)

Nominal Shelf Depth	Actual Depth with Bumpers	Space Occupied by Each Quantity of Mobile Units										
		qty. 1	qty. 2	qty. 3	qty. 4	qty. 5	qty. 6	qty. 7	qty. 8	qty. 9	qty. 10	qty. 11
(in.) 18	20.5	20.5	41	61.5	82	102.5	123	143.5	64	184.5	205	225.5
(in.) 21	23.5	23.5	47	70.5	94	117.5	141	164.5	188	211.5	—	—
(in.) 24	26.5	26.5	53	79.5	106	132.5	159	185.5	212	—	—	—
(mm) 457	520.5	520.5	1041	1561.5	2082	2602.5	3123	3643.5	4164	4684.5	5205	5725.5
(mm) 530	593.5	593.5	1187	1780.5	2374	2967.5	3561	4154.5	4748	5341.5	—	—
(mm) 610	673.5	673.5	1347	2020.5	2694	3367.5	4041	4714.5	5388	—	—	—

### Replacement Parts

Rollers (bag of 4)\*

Bumpers for mobile units\*

Caster\*

Track joining kits

Hardware for track

Footplates\*

### Model No.

**MAXROLL**

**M9992DBX**

**5MOOR** (plated stem/horn); **5MOORSA** (stainless steel stem/horn)

**HDWE-TTJOIN**

**RPHDWE-TTECAP**

**9993Z** (zinc plated), **9993S** (Stainless Steel)

\*Note: compatible with all MetroMax systems, past and present.



We put space to work.®

# MetroMax® Top-Track® High-Density Storage

## Order Guide

**1. Identify the available floor space**  
Evaluate Top-Track configurations to fill the space. The amount of space needed for the Top-Track unit is calculated by using this formula: Nominal track length + Nominal widths of each end unit + 2" (51mm).

**2. Choose the shelving and desired posts.**  
Choose **(1) end unit kit** based on shelf depth.  
Choose **(1) track set** to fill the space.  
Select **shelves**.

**3. Determine the desired open aisle space.**  
Reference the Mobile Unit — Space Calculator table on the previous page to select the depth and quantities of mobile units.

Select **mobile unit kits** (including finish for the casters). One needed per mobile unit.  
Select **shelves**.

## Example: (using MetroMax i)

**1.** 196" (4979mm) of floor space  
12' track + 24" end + 24" end + 2" = 194"  
3657mm + 610mm + 610mm + 51mm = 4928mm  
Top-Track system can be assembled to fill 194"  
(4928mm) length of floor space.

**2.** End unit kit **MXTTE24** (qty. 1)  
Grid shelves **MX2448G** (qty. 8)  
Solid shelves **MX2448F** (qty. 2)  
Track Set **TTS12NA** (qty. 1)

**3.** Desired open aisle is 36" (914mm).  
Tracks measure 12' or 144" (3657mm).

Available space for mobile units is:  
144" - 36" = 108" (3657 - 914 = 2743mm)

Each nominal 24" (610mm) unit measures 26.5"  
(673.5mm) when you include the bumpers.  
(4) 26.5" (673.5mm) deep units = 106" (2440mm)

Mobile unit kit **MXTTM24C** (qty. 4)  
Grid shelves **MX2448G** (qty. 12)  
Solid shelves **MX2448F** (qty. 4)

## Top-Track Floor Pad Protectors

- Compensate for soft flooring materials by protecting the floor from normal wear and tear from mobile units.
- To make more applicable for sterile environments a bead of silicone (not included) is recommended to seal the seam between the floor pads and the floor.
- Material: aluminum

## Top-Track Wall Mount Bracket

Used to attach one set of tracks to the wall. Eliminates the need for a stationary end unit. Includes one pair of plated wall brackets. Hardware to attach the brackets to the wall is NOT included.


**Model No. TTWM**

## Top-Track Stop Plate Kit

Used in conjunction with the Wall Mount Bracket kit. The aluminum stop plates bolt to the underside of the track next to the wall brackets to prevent mobile units from bumping into the wall.

**Model No. TTSTP**


For Track Length			For Track Length		
(ft)	(mm)	Model No.	(ft)	(mm)	Model No.
6	1828	<b>FPS6N</b>	14	4267	<b>FPS14N</b>
7	2135	<b>FPS7N</b>	15	4572	<b>FPS15N</b>
8	2440	<b>FPS8N</b>	16	4877	<b>FPS16N</b>
9	2743	<b>FPS9N</b>	17	5182	<b>FPS17N</b>
10	3048	<b>FPS10N</b>	18	5486	<b>FPS18N</b>
11	3353	<b>FPS11N</b>	19	5791	<b>FPS19N</b>
12	3657	<b>FPS12N</b>	20	6096	<b>FPS20N</b>
13	3962	<b>FPS13N</b>	21	6400	<b>FPS21N</b>



TTWM



TTSTP



Top-Track® Floor Protectors



We put space to work.

# qwikTRAK® High-Density Storage System —

for Super Erecta®, Super Adjustable Super Erecta, and MetroMax® Storage System



- **Maximizes Storage Capacity:** High-Density qwikTRAK can increase the storage capacity of a given area up to 50%. Mobile units are positioned between stationary units and an active aisle can be opened between any two units as needed. This efficient utilization of space addresses the storage needs of growing operations and may eliminate the need for facility expansion or renovation.
- **Ideal for Rough or Choppy Floors:** Floor tracks compensate for rough or choppy floors and provide a smooth, level surface to guide the mobile units in a straight line.
- **Accessible and Ergonomic:** The low profile and sloped sides of the guiding track, combined with the easy-to-move mobile units, provide safe and easy access to all stored products. Mobile units roll easily along the track, even when moving heavy loads.
- **Easy to Lay Out and Assemble:** Select end, intermediate, or mobile kits and just add shelves! Units are quick and easy to assemble. The guiding track is easily positioned. The end stationary units anchor the system and the guiding track to the floor.
- **Strong and Durable:** Standard Metro qwikTRAK systems can store and move heavier loads than overhead track shelving.
- **Weight load capacities** (evenly distributed):
  - All stationary units:**
    - 2,000 lbs (907 kg) evenly distributed
  - Mobile units:**
    - Super Erecta, Super Adjustable, and MetroMax Q mobile unit: 2,000 lbs (907 kg)
    - MetroMax i mobile unit: 1,200 lbs (544 kg) per unit
    - MetroMax 4 mobile unit: 800 lbs (363 kg) per unit

- **Versatile:** qwikTRAK is designed to fit most of Metro's shelving systems and can be configured in different lengths and widths.

### Super Erecta

#### Dry environment:

- Kits with chrome posts for use with Chrome plated wire, Metro BRITE finish wire, Galvanized Solid shelving.

#### All environments:

- Kits with Stainless Steel posts for use with Type 304 stainless steel wire or solid shelving.
- Kits with Metroseal Green coated posts for use with Metroseal Green (K3) wire shelving & Super Erecta Pro with removable plastic shelf mats.
- Kits with Metroseal Gray coated posts.

### MetroMax - For use in all environments:

MetroMax Kits are available with either all-polymer posts or epoxy coated posts. All-polymer posts offer rust-proof performance and are commonly used with MetroMax i and MetroMax 4 all-polymer shelving. Polymer posts may be used with MetroMax Q for added corrosion protection. Epoxy coated steel posts offer corrosion resistance and improved rigidity. They are commonly used with MetroMax Q corrosion resistant shelving. The epoxy coated steel posts may be used with MetroMax i or MetroMax 4.

- **Microban antimicrobial product protection** is built-into the MetroMax shelves and posts, Super Erecta Pro shelves, and Metroseal finish to keep the products "cleaner between routine cleanings".

Microban antimicrobial product protection inhibits the growth of microorganisms that cause odors and product degradation.

All Metro Catalog Sheets are available on our website: [www.metro.com](http://www.metro.com)



LO3-249 Printed in U.S.A. 1/21

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2021 InterMetro Industries Corp.



qwikTRAK® High-Density Storage System —  
for Super Erecta®, Super Adjustable Super Erecta, and MetroMax® Storage System







# qwikTRAK<sup>®</sup> High-Density Storage System —

for Super Erecta<sup>®</sup>, Super Adjustable Super Erecta, and MetroMax<sup>®</sup> Storage System

## SYSTEM COMPONENTS

- A = Stationary End Units
- B = Mobile Units
- C = Floor Track
- D = Stationary Intermediate Unit
- E = Active Aisle

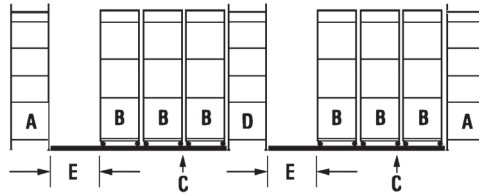

## System Measurements

- Actual length: Nominal track length + the nominal width of each end unit + 3" (76mm)
- Actual width: Nominal Shelf length + 3.5" (89mm)
- Actual height of a mobile qwikTRAK unit is: Nominal post height + 4.5" (115mm)
- It is recommended that the tracks are installed at least 2" (52mm) from the wall.

## Mobile Unit Measurements

To accommodate bumpers, the actual size of a mobile unit is 2.5" (63.5mm) wider than the shelf width shown. For example, an 18" (457mm) wide unit is actually 20.5" (521mm).

**Choosing shelves:** All end, intermediate, and mobile units must be 18" (457mm) or wider. Each stationary end and intermediate unit must have a minimum of four shelves. Super Adjustable shelves may be used for all tiers.

## Stationary End Unit Kit (Choose one kit for each system)

Includes 74" high posts (1880mm) high stationary posts, and hardware necessary for connecting stationary end units to tracks. Shelves are sold separately.




Traditional Configuration with stationary end units. ONE End Unit Kit is required per system. Shelves are ordered separately.

Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta				MetroMax Q Steel Posts		MetroMax Polymer Posts		
Approx. Pkd. Wt. (lbs.) (kg)	Chrome-Plated Cat. No.	Metroseal Green with Microban <sup>®</sup> Cat. No.	Metroseal Gray with Microban <sup>®</sup> Cat. No.	Stainless Steel Cat. No.	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
39.6 18.0	<b>BTEC</b>	<b>BTEK3</b>	<b>BTEK4</b>	<b>BTES</b>	42.0 19.1	<b>BTEQ3</b>	25.0 11.4	<b>BTEX3</b>

**Note:** Chrome plated kits include plated foot plates. All others include Stainless Steel foot plates.

## Stationary Intermediate Units

Required when overall desired track length exceeds 21' (6405mm). Optional when track length is under 21' (6405mm). Includes 74" high posts (1880mm) high stationary posts, and hardware necessary for connecting one stationary intermediate unit to tracks. Shelves are sold separately.




ONE Intermediate Kit (see rules). Shelves are ordered separately.

Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta				MetroMax Q Steel Posts		MetroMax Polymer Posts		
Approx. Pkd. Wt. (lbs.) (kg)	Chrome-Plated Cat. No.	Metroseal Green with Microban <sup>®</sup> Cat. No.	Metroseal Gray with Microban <sup>®</sup> Cat. No.	Stainless Steel Cat. No.	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
22.6 10.3	<b>BTAC</b>	<b>BTAK3</b>	<b>BTAK4</b>	<b>BTAS</b>	24.2 11.0	<b>BTAQ3</b>	15.7 7.1	<b>BTAX3</b>

**Note:** Chrome plated kits include plated foot plates. All others include Stainless Steel foot plates.

## Mobile Units (One kit required per mobile unit)

Includes four 74" (1880mm) high mobile posts, four casters, donut bumpers, and other hardware to assemble a mobile unit. Shelves are sold separately.



ONE Mobile kit per mobile unit. Example: (6) needed in the above picture. Shelves are ordered separately.

Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta				MetroMax Q Steel Posts		MetroMax Polymer Posts		
Approx. Pkd. Wt. (lbs.) (kg)	Chrome-Plated Cat. No.	Metroseal Green with Microban <sup>®</sup> Cat. No.	Metroseal Gray with Microban <sup>®</sup> Cat. No.	Stainless Steel Cat. No.	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
25.0 11.4	<b>BTMC</b>	<b>BTMK3</b>	<b>BTMK4</b>	<b>BTMS</b>	27.0 12.3	<b>BTMQ3</b>	18.5 8.4	<b>BTMX3</b>

**Note:** Casters feature an acetyl grooved wheel. Chrome plated mobile kits include casters with plated steel components. All others include casters with stainless components.

Under normal conditions, aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).



## Track Sets

Includes tracks and hardware needed to assemble track runs up to 21' (6400mm).



Tracks to connect the stationary units. Example: (2) BTS9NA used in the above example.

Dimensions Length		Approx. Pkd. Wt.		Super Erecta Brite Cat. No.	Dimensions Length		Approx. Pkd. Wt.		Chrome Cat. No.
(ft.)	(mm)	(lbs.)	(kg)		(ft.)	(mm)	(lbs.)	(kg)	
2.5	762	4	1.8	<b>BTS2.5NA</b>	14	4267	19	8.6	<b>BTS14NA</b>
6	1828	9	4.1	<b>BTS6NA</b>	15	4572	21	9.5	<b>BTS15NA</b>
7	2135	10	4.5	<b>BTS7NA</b>	16	4877	22	10.0	<b>BTS16NA</b>
8	2440	11	5.0	<b>BTS8NA</b>	17	5182	23	10.5	<b>BTS17NA</b>
9	2743	13	5.9	<b>BTS9NA</b>	18	5486	25	11.4	<b>BTS18NA</b>
10	3048	14	6.4	<b>BTS10NA</b>	19	5791	26	11.8	<b>BTS19NA</b>
11	3352	15	6.8	<b>BTS11NA</b>	20	6096	27	12.3	<b>BTS20NA</b>
12	3657	17	7.7	<b>BTS12NA</b>	21	6400	29	13.2	<b>BTS21NA</b>
13	3962	18	8.2	<b>BTS13NA</b>					

**Note:** BTS2.5NA includes a joining kit to connect the tracks to other track sets.

## For best performance on heavily loaded systems:

- For configurations using shelves 60" (1524mm) or longer and managing heavier loads choose a more rigid shelving option.
  - Wire Shelving** – Use all SES wire shelves.
  - Polymer Shelving** (MetroMax) – Epoxy coated steel posts offer the most rigid configuration.
- Weight capacities (evenly distributed) - Mobile Units.
  - Super Erecta, Super Adjustable, and MetroMax Q: up to 2,000 lbs. (907kg)
  - MetroMax i mobile: up to 1,200 lbs. (544kg)
  - MetroMax 4 mobile: up to 800 lbs (363kg)
- When using long tracks, 13ft or longer, securing the stationary units to the floor will help to keep the system in alignment.



## Additional Configuration Notes

- qwikTRAK is available with 74" posts (1880mm) as standard. Requests for TALLER posts must be reviewed by Metro Engineering. For applications requiring posts SHORTER than 74" (1880mm), contact your Metro representative.
- Existing Metro Super Erecta, Super Adjustable, Super Erecta Pro, MetroMax Q, MetroMax 4, and MetroMax i shelving units can be retrofitted as part of a qwikTRAK installation.

## Installation Guidelines

- It is recommended that the tracks are installed a minimum of 2" (51mm) from the wall.
- It is the discretion of the user to install the end units to the floor.

## Mobile Unit - Space Calculator

Use to help determine the quantity of mobile units and the open aisle dimension.

Nominal Shelf Depth	Actual Depth with Bumpers	Space occupied by each mobile unit											
		qty. 1	qty. 2	qty. 3	qty. 4	qty. 5	qty. 6	qty. 7	qty. 8	qty. 9	qty. 10	qty. 11	
in.	18	20.5	20.5	41	61.5	82	102.5	123	143.5	64	184.5	205	22.5
	21	23.5	23.5	47	70.5	94	117.5	141	164.5	188	211.5	--	--
	24	26.5	26.5	53	79.5	106	132.5	159	185.5	212	--	--	--
mm	457	520.5	520.5	1041	1561.5	2082	2602.5	3123	3643.5	4164	4684.5	5205	5725.5
	530	593.5	593.5	1187	1780.5	2374	2967.5	3561	4154.5	4748	5341.5	--	--
	610	673.5	673.5	1347	2020.5	2694	3367.5	4041	4714.5	5388	--	--	--

## qwikTRAK® High-Density Storage System –

for Super Erecta®, Super Adjustable Super Erecta,  
and MetroMax® Storage System



We put space to work.®

### Specifications

- Track and joining channel: Aluminum extrusion 6063 with 1/2" (13mm) square stainless steel tubing. Joining channel is stainless steel.
- End plate and mounting plates (connect post with foot plate to track): Aluminum.
- Casters and Caster Horns: 31/4" (83mm) acetyl wheel. Chrome-plated kits include casters with plated horns. All other systems include casters with stainless steel horns.
- Shelving: see spec sheets for Super Erecta (10.01), Super Adjustable (10.01A), MetroMax i (9.20), MetroMax 4 (9.22) and MetroMax Q (9.21).
- Footplates and Hardware: Chrome-plated kits include plated footplates and hardware. All other systems include stainless steel footplates and hardware.



**Configuring a system with one or no stationary end units. A stop plate kit may be used in place of one end unit.** The kit contains two "L-shaped" stop plates that mount to the ends of the floor tracks. The stop plates prevent a mobile unit from rolling off the end of the tracks.

Note: Do not order the regular end unit kit from page 2. Consult your Metro representative to configure the system.

#### How to configure –


**One stationary end unit, One stop plate kit on opposite end.**

- (1) BTSP kit of (2) stop plate kits
- (4) Posts (4) 74" stationary posts.
- (1) End Plate kit. Consult your Metro representative for part.

#### How to configure –

**Stop plate kits on both ends.**

- (2) BTSP kit of (2) stop plate kits
- (1) End Plate kit. Consult your Metro representative for part



BTSP stop plate kit installed on the end kit.

Replacement Parts for Standard qwikTRAK	Super Erecta and Super Adjustable Cat. No.	MetroMax i, 4 & Q Cat. No.
Caster with plated Horn	RPC02-317A	—
Caster with Stainless Horn	RPC02-317B	RPC02-317B
Bumper	9992DB	M9992DBX
End Plates and Hardware for End Unit	RPHDWE-BTEND	RPHDWE-BTEND
Footplates	9993Z (zinc plated) 9993S (stainless)	9993S (stainless)
Joining Channel (2 per set)	BTJKN	BTJKN



qwikTRAK caster

\*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.